

Power Inserters

VSAT 10MHz Generator

The Global Professional +16dB slope equalised Line Amplifiers are high quality amplifiers (with DC Pass) for the professional user. The product is

housed in our standard EMI enclosure and is CE

approved.



Unit is line powered however a DC injected version is available upon request.

L-TVRO16/AN-DCP



Specifications

Input Frequency	950-2150MHz
Gain @ 950MHz	+11dB
Gain @ 2150MHz	+16dB
Variation	± 1dB
Max. Distortion Free Output (-35dB C/I 2 Tone)	-15dBm 93dBμV
Current Passing	500mA
Current Consumed	< 50mA
I/P Voltage	12V -24V
Connector type	'N' 50Ω Female
Dimensions	56mm x 35mm x 25mm
Weight	250 grams
RoSH/WEEE Compliant	YES

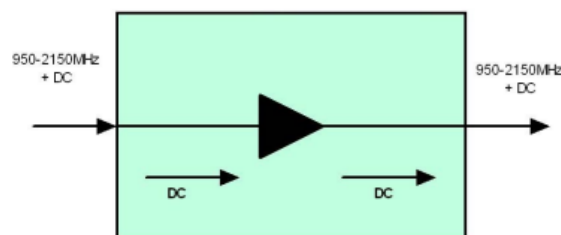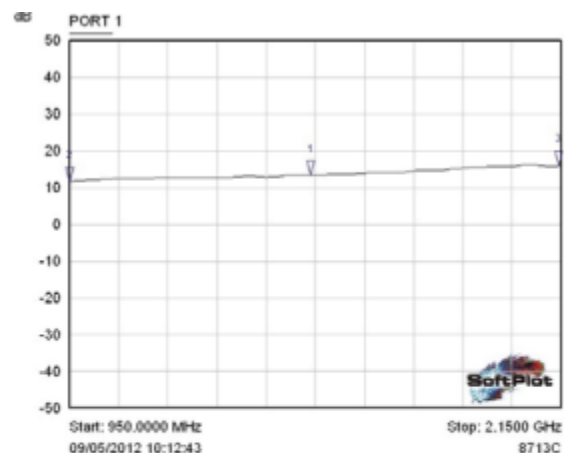

Typical Configuration