

BUC/SSPA

KU-BAND 80W ATOMBKU080

Available Frequency Bands:





Standard

Frequency Band: 14.0-14.5
 L.O. Frequency: 13.05
 IF Frequency: 950-1450

Extended

Frequency Band: 13.75-14.5
 L.O. Frequency: 12.80
 IF Frequency: 950 - 1700

ATOMBKU080S1AFI






BUC/SSPA

KU-BAND 80W ATOMBKUG

Output Power (Psat)	50 dBm min.	Input Voltage	+ 18V to + 56V DC via power connector
Output Power (P1dB)	49 dBm min.	Power Consumption	610 W max.
Phase Noise (SSB) max.	-72 dBc/Hz at 1kHz -82 dBc/Hz at 10kHz -92 dBc/Hz at 100kHz -102 dBc/Hz at 1MHz	Power Connector	MIL-26482 Series 1 receptacle Shell Size 22, 4 Pins ACS06E22-22P-472
Linear Gain	≥ 60 dB	Input (waterproof)	Type N Connector (50 Ohm)
Gain Flatness: (BUC)	Over Full Band ≤ 6.0 dB p-p Over Any 40 MHz ≤ 1.5 dB p-p Over Temperature ≤ 3.0 dB p-p	Output (waterproof)	WR-75 waveguide grooved
Gain Flatness: (SSPA)	Over Full Band ≤ 8.0 dB p-p Over Any 40 MHz ≤ 3.0 dB p-p Over Temperature ≤ 3.0 dB p-p	M&C Interface	A: Addressable RS-485 B: RS-485 & Ethernet
Output Spurious: (BUC)	In-Band ≤ -55 dBc Out-of-Band @ P1dB ≤ -55 dBc	Dimensions (L x W x H) max.	295 mm x 135 mm x 164 mm (11.60 in x 5.34 in x 6.47 in)
Output Spurious: (SSPA)	In-Band ≤ -60 dBc Out-of-Band @ P1dB ≤ -55 dBc	Weight	< 6.5 kg (14.25 lb)
Noise Power Density	-65 dBm/Hz in Tx -65 dBm/Hz in Rx	Operating Temperature	-40 to +60°C
Input VSWR	2.0 : 1 max.	Storage Temperature	-50 to +80°C
Output VSWR	2.0 : 1 max.	Humidity	100 % condensing
		External Ref Freq	10MHz (sine-wave), -5 to +5 dBm
		Enclosed Accessories	Screws, Gasket, M&C Connector, Power Connector

ATOMBKU080S1AFI

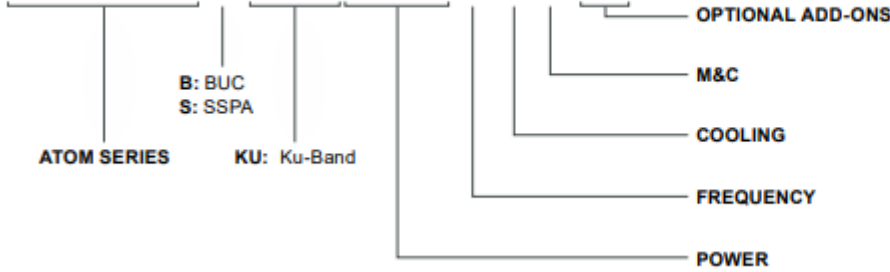

BLANK: No Add-on
F: EMI/EMC Filter
I: Internal Reference
FI: EMI/EMC Filter & Internal Reference
A: Addressable RS-485
B: RS-485 & Ethernet
1: Internal Fan
2: External Baseplate
S: Standard
E: Extended
080: 80W

KU-BAND 80W BUC: ATOMBKU080

MONITOR & CONTROL

M&C Interface:	Addressable RS-485, or RS-485 & Ethernet
M&C Connector:	MIL-26482 Series 1 receptacle, Shell Size 12, 10 Pins 58-533723-10P
Mute Control:	Fully configurable (mute enable: high or low, mute default: enabled or disabled)
Low	0.0 - 0.8V
High	3.0 - 5.0V

OPTIONAL CONFIGURATION ADD-ONS

EMI/EMC Filter:	MIL-STD-461
Internal Reference:	With External 10 MHz Reference Auto-Switch

OPTIONAL ACCESSORIES

Power Supply	PS600-AT2-(NA/UK/EU/IEC)
M&C Cable	CABLEM+C-AT10